

DSP/DSPK Series

Sewage Pumps



Công ty TNHH TBKT An Quang
 Hotline: 0901.120122 - 0901.171667 - 0905.468093
 Địa chỉ: 438 Ông Ích Khiêm - Thanh Khê - Đà Nẵng
 Email: phucnt@anquang.com - kinhdoanh@anquang.com

DSP/DSPK

Sewage Pumps

FOR: VIETNAM, TAIWAN

Đường cong / Curve

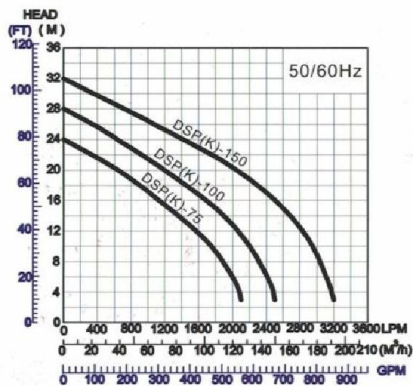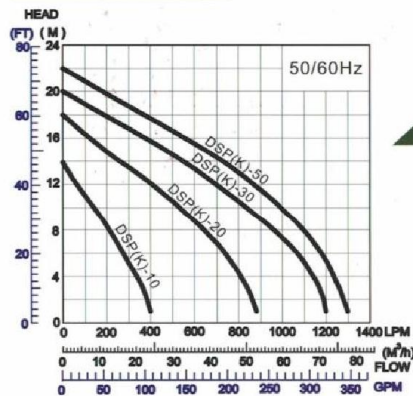

- Liquid temperature: 0~40°C / 32~104°F
- HP range: 1~15 HP / 0.75~11KW
- PH value: 6~8
- Rated speed: 2900 / 3450rpm
- IP class: IP68
- Max. depth: 8M

xác nhận / Certification



Tính năng / Features

1. The seal and flow channel are separated to reduce negative pressure.
2. Solid single impeller, strong liquid carrier.
3. The material of impeller and base plate are FCD45. (Hardness treatment: 58)
4. H class motor insulation. (180°C)
5. The cutter is made of tungsten steel.

Ứng dụng / Applications

1. Industrial sewage discharge
2. Environmental protection system
3. Optional pedestal

Đặc điểm kỹ thuật / Specification



Model No.	Output		Outlet		Pass Solid Dia(mm)	Max Flow (LPM)	LPM Flow @ Head					Max Head (M)	Weight Kg
	HP	KW	mm	inch			3M	6M	9M	12M	15M		
DSP(K)-10	1	0.75	50	2"	30	400	370	270	180	60	-	14	31
DSP(K)-20	2	1.5	80	3"	40	880	840	740	590	410	190	18	37
DSP(K)-30	3	2.2	80	3"	40	1200	1170	1070	900	700	470	20	55
DSP(K)-50	5	3.7	100	4"	45	1300	1260	1180	1050	870	650	22	57

Model No.	Output		Outlet		Pass Solid Dia(mm)	Max Flow (LPM)	LPM Flow @ Head					Max Head (M)	Weight Kg
	HP	KW	mm	inch			5M	10M	15M	20M	25M		
DSP(K)-75	7.5	5.5	100	4"	50	2100	2050	1750	1250	650	-	24	99
DSP(K)-100	10	7.5	150	6"	65	2500	2450	2200	1800	1200	500	28	109
DSP(K)-150	15	11	150	6"	65	3200	3150	2950	2600	2050	1250	32	149


*K" means cutter impeller

07

Sơ đồ chức năng / Schematic Function

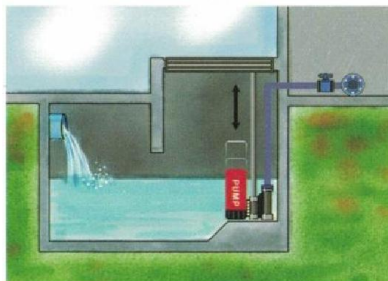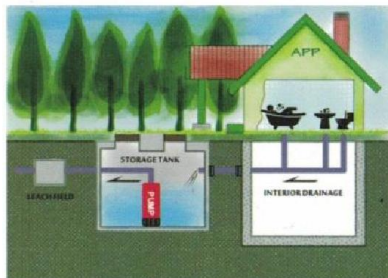

Cắt View / Sectional View

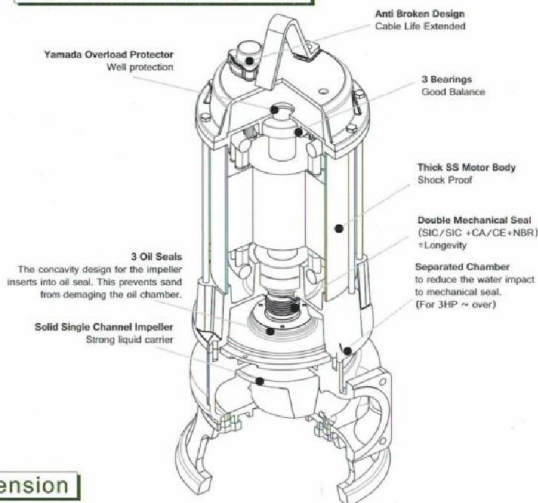

Kích thước / Dimension

Model	L	W	W1	W2	H	H1	H2	H3	H4	PCD	G
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	inch
DSP(K)-10	250	183	96	125	490	260	106	98	120	N/A	2
Model	L	L1	L2	W	H	H1	H2	H3	H4	PCD	G
	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	inch
DSP(K)-20	376	245	103	238	590	500	155	197	225	117	3
DSP(K)-30	430	260	186	245	625	525	177	235	265	155	3
DSP(K)-50	430	260	186	245	655	555	177	235	265	155	3
DSP(K)-75	505	315	150	300	770	675	200	273	320	165	4
DSP(K)-100	505	315	150	300	815	720	200	273	320	165	4
DSP(K)-150	610	355	252	340	880	760	225	305	340	210	6

Các phụ kiện tiêu chuẩn / Standard Accessories

Model No.	Accessories	Pedestal Type
DSP(K)-10	Flange · Hose connection	TOS-SG
DSP(K)-20	Elbow · Flange	TOS-L3
DSP(K)-30	Elbow · Flange	TOS-L3
DSP(K)-50	Elbow · Flange	TOS-L3
DSP(K)-75	Elbow · Flange	TOS-X4
DSP(K)-100	Elbow · Flange	TOS-X6
DSP(K)-150	Elbow · Flange	TOS-X6



08

DSP/DSPK Series

