






Công ty TNHH TBKT An Quảng
Hotline: 0901.120122 - 0901.171667 - 0905.468093
Địa chỉ: 438 Ông Ích Khiêm - Thanh Khê - Đà Nẵng
Email: phucnt@anquang.com - kinhdoanh@anquang.com



F/FN **50Hz**
SERIES
SUBMERSIBLE SEWAGE
EFFLUENT PUMPS

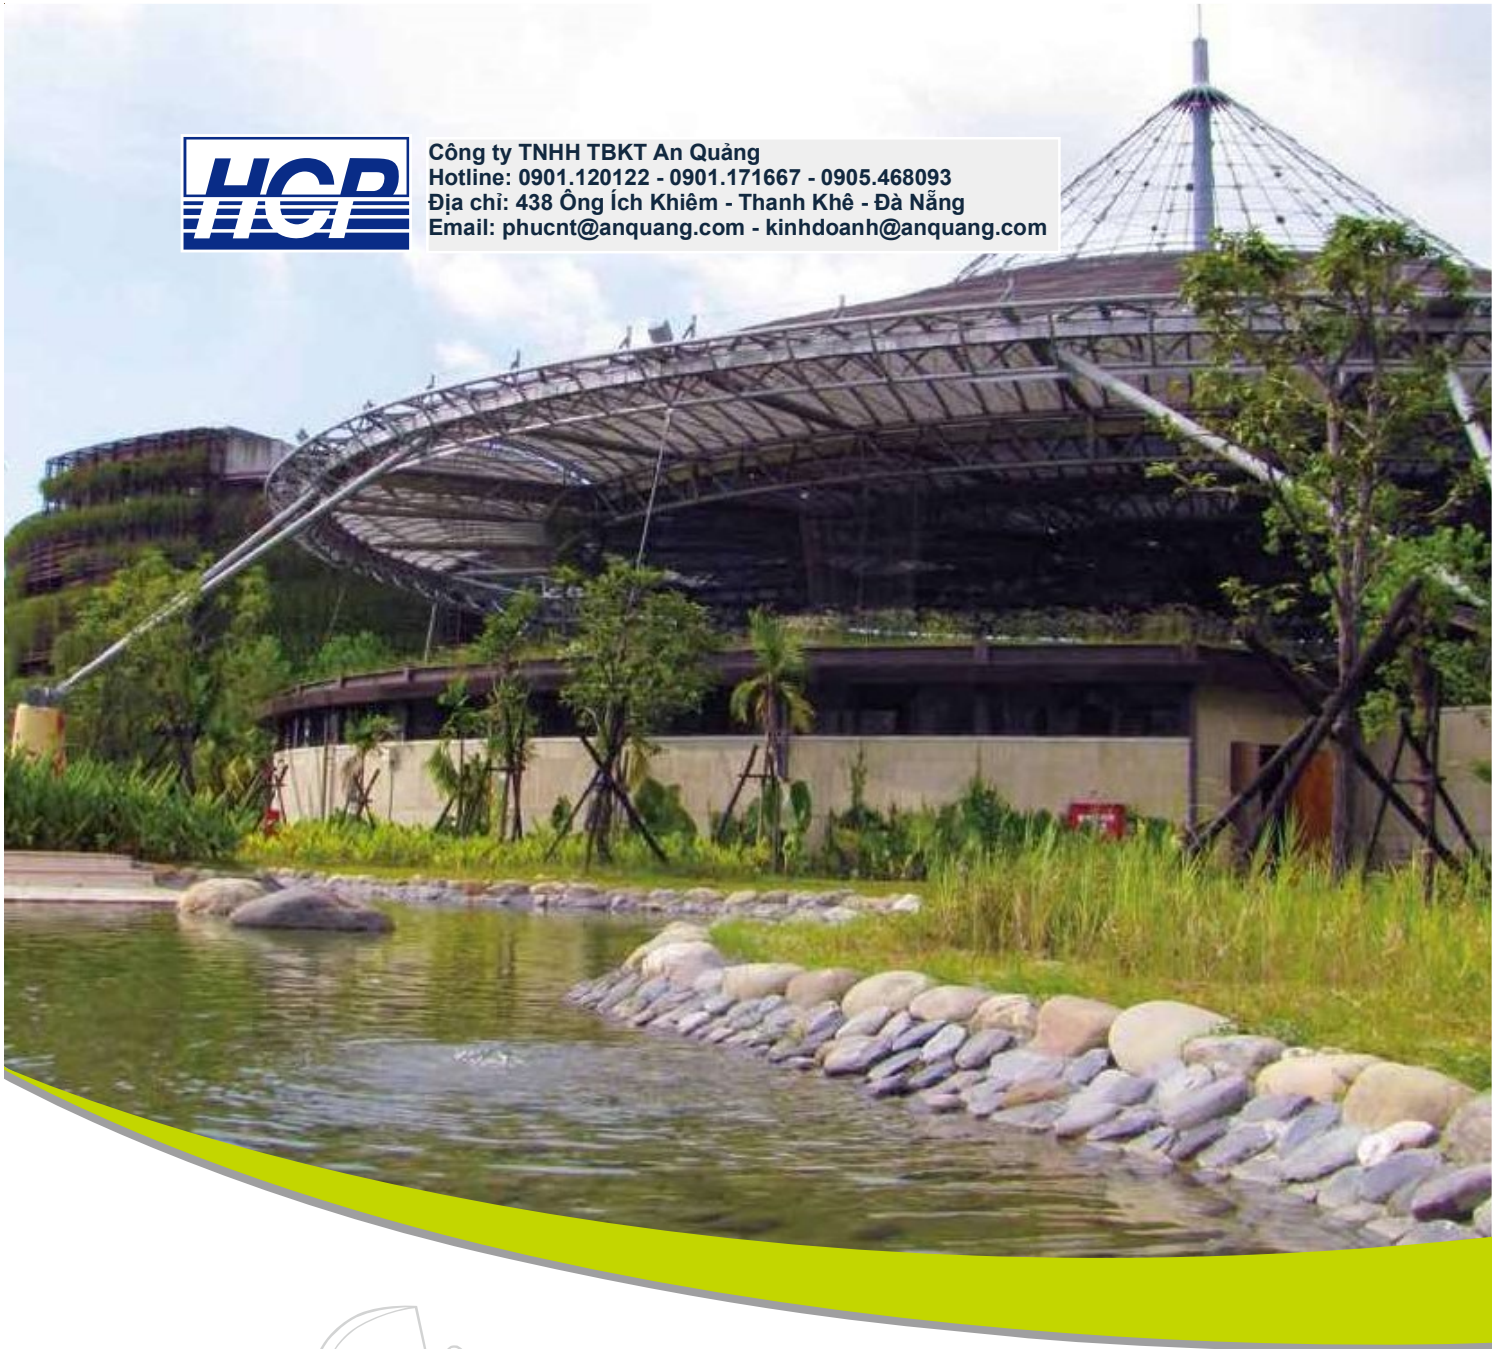

F-05A F-04/05/21U FN-22U FN-32/33/35U F-05/21P FN-32/33/35P F-31U



FN-32/33U FN-32/33P

※ Optional : Vertical casing

F/FN

Công ty TNHH TBKT An Quảng
Hotline: 0901.120122 - 0901.171667 - 0905.468093
Địa chỉ: 438 Ông Ích Khiêm - Thanh Khê - Đà Nẵng
Email: phucnt@anquang.com - kinhdoanh@anquang.com

FEATURES

- U/P Type impellers are designed to meet the various different operating ranges in wastewater applications.
- F/FN UL Type Non-clog models, capable passing larger solid.
- Optional casing: The FN-32/33U and FN-32/33P models have vertical casing available.
- HCP's professional assembly line, complimented with a synthetic production test to ensure each IP68 motor with highest level of final pump quality.
- Oil Elevation Disk design in the oil chamber to ensure the mechanical seals lubrication and to extend the service life of pump.
- Standard accessories include : cable with an epoxy resin sealed waterresistant cable base, Auto-cut Protector, double mechanical seals, Food grade lubricant and oil seal design.

APPLICATIONS

- Drainage of sewage from the building basements, hotel industry, and waste water from factories.
- Drainage of sewage from industrial process factories.
- Emptying of septic tanks, cesspits and sewage pump stations.
- Pumping surface and drainage water from garages and sprinkler systems.

U Type Vortex Impeller



Vortex impeller produces a vortex (whirlpool effect) allowing long fibrous materials and solid waste to pass through, without contact with the impeller.

P Type Open Impeller




Open impeller (Single or Two Vanes) design. Impeller is excellent to use for waste materials to prevent clogging.

SPECIFICATIONS

| Item | Description | |
|---------------|--|--|
| Limits Of Use | Liquid Temp. | 0~40°C (32~104°F) |
| | Applications | General wastewater • Sewage and Industrial water |
| Type | Frequency | 50Hz |
| | Motor | 2P (3000rpm) • Dry Motor (F- 05A : Oil Motor) |
| | Insulation | Class B (0.5~1HP) • Class F (2~5HP) |
| | Protection | IP68 |
| | Protector | Auto-cut (0.5HP 1Ø : Thermal) |
| | Bearing | Ball Type |
| | M.seal | Double M.seals (F-05A : Single M.seals) |
| Material | Impeller | Vortex • Open |
| | Upper Cover | FC200 / GG-20 |
| | Motor Frame | SUS304 / X5CrNi18-10 |
| | Shaft | SUS410 / X10Cr13 (0.5~1HP) • SUS403 / X5Cr13 (2~5HP) |
| | M.seal | CA/CE & SiC/SiC (F-05A : CA/CE) |
| | Casing | FC200 / GG-20 |
| | Impeller | FC200 / GG-20 (F-05A : PA) |
| | Cable | VCT or H07RN-F |
| Optional | Pumps can be customized to fit specifications Floating Switch (2P : 0.5~3HP) | |

PRODUCT NOMENCLATURE





FN — 3 — 2 — U — L
 Type Discharge HP Impeller type Larger solid handling
 inch (U/P)

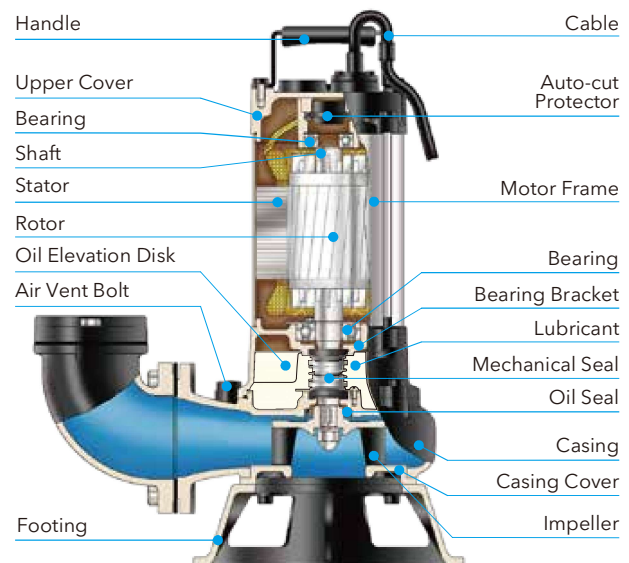



Công ty TNHH TBKT An Quảng
Hotline: 0901.120122 - 0901.171667 - 0905.468093
Địa chỉ: 438 Ông Ích Khiêm - Thanh Khê - Đà Nẵng
Email: phucnt@anquang.com - kinhdoanh@anquang.com

PERFORMANCE CURVES

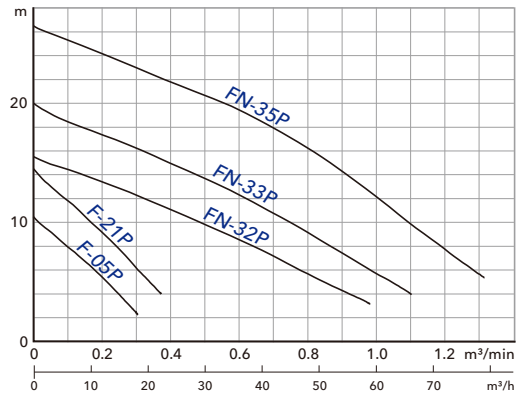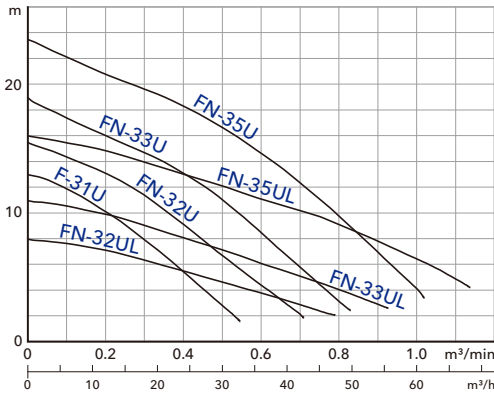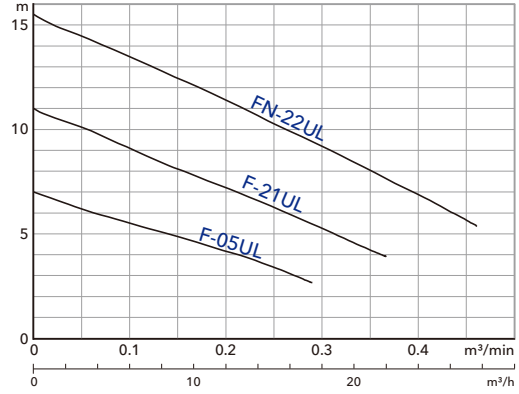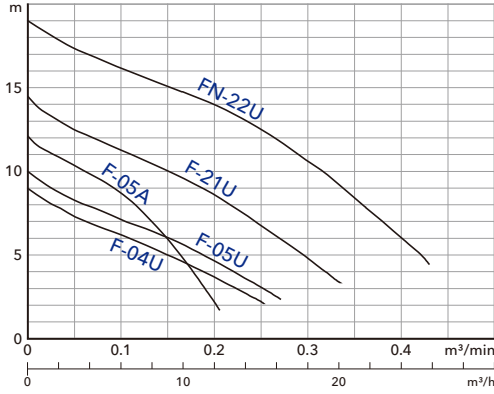

PERFORMANCE SPECS.

※ Note : Weight Without Cable & Elbow Set.
 Casing type: V stands for Vertical and H for Horizontal.

| | Model | Output HP(kW) | Discharge Inch(mm) | Phase Ø | Start Method | Head m | Standard | | Solid Passage mm | Casing Type | Weight kg | |
|---------|---------|---------------|--------------------|-----------|--------------|--------|----------|------|------------------|-------------|-----------|----|
| | | | | | | | m³/min | m³/h | | | 1Ø | 3Ø |
| U Type | F-05A | 0.5 (0.4) | 2" (50) | 1 | Capacitor | 8 | 0.12 | 7.2 | 10 | V | 12 | - |
| | F-04U | 0.5 (0.4) | 2" (50) | 1 | Capacitor | 5 | 0.15 | 9 | 35 | V | 15 | - |
| | F-05U | 0.5 (0.4) | 2" (50) | 1 | Capacitor | 6 | 0.15 | 9 | 35 | V | 16 | 15 |
| | | | | 3 | DOL | | | | | | | |
| | F-21U | 1 (0.75) | 2" (50) | 1 | Capacitor | 8 | 0.2 | 12 | 35 | V | 17 | 16 |
| | | | | 3 | DOL | | | | | | | |
| | F-31U | 1 (0.75) | 3" (80) | 1 | Capacitor | 7 | 0.3 | 18 | 30 | V | 18 | 17 |
| | | | | 3 | DOL | | | | | | | |
| | F-05UL | 0.5 (0.4) | 2" (50) | 1 | Capacitor | 4 | 0.2 | 12 | 50 | V | 17 | 16 |
| | | | | 3 | DOL | | | | | | | |
| | F-21UL | 1 (0.75) | 2" (50) | 1 | Capacitor | 6 | 0.25 | 15 | 50 | V | 18 | 17 |
| | | | | 3 | DOL | | | | | | | |
| | FN-22U | 2 (1.5) | 2" (50) | 1 | Capacitor | 14 | 0.2 | 12 | 35 | V | 30 | 25 |
| | | | | 3 | DOL | | | | | | | |
| | FN-32U | 2 (1.5) | 3" (80) | 1 | Capacitor | 8.5 | 0.4 | 24 | 50 | H/V | 32 | 28 |
| | | | 3 | DOL | | | | | | | | |
| FN-33U | 3 (2.2) | 3" (80) | 1 | Capacitor | 12.5 | 0.4 | 24 | 50 | H/V | 35 | 30 | |
| | | | 3 | DOL | | | | | | | | |
| FN-35U | 5 (3.7) | 3" (80) | 3 | DOL | 16.5 | 0.5 | 30 | 50 | H | - | 33 | |
| FN-22UL | 2 (1.5) | 2" (50) | 1 | Capacitor | 10 | 0.25 | 15 | 50 | V | 31 | 26 | |
| | | | 3 | DOL | | | | | | | | |
| FN-32UL | 2 (1.5) | 3" (80) | 1 | Capacitor | 4.5 | 0.5 | 30 | 76 | H | 35 | 30 | |
| | | | 3 | DOL | | | | | | | | |
| FN-33UL | 3 (2.2) | 3" (80) | 1 | Capacitor | 7 | 0.5 | 30 | 76 | H | 37 | 32 | |
| | | | 3 | DOL | | | | | | | | |
| FN-35UL | 5 (3.7) | 3" (80) | 3 | DOL | 11 | 0.6 | 36 | 76 | H | - | 35 | |
| P Type | F-05P | 0.5 (0.4) | 2" (50) | 1 | Capacitor | 5.5 | 0.2 | 12 | 22 | V | 16 | 15 |
| | | | | 3 | DOL | | | | | | | |
| | F-21P | 1 (0.75) | 2" (50) | 1 | Capacitor | 9 | 0.2 | 12 | 26 | V | 20 | 19 |
| | | | | 3 | DOL | | | | | | | |
| | FN-32P | 2 (1.5) | 3" (80) | 1 | Capacitor | 8.5 | 0.6 | 36 | 35 | H/V | 34 | 30 |
| | | | | 3 | DOL | | | | | | | |
| FN-33P | 3 (2.2) | 3" (80) | 1 | Capacitor | 12 | 0.6 | 36 | 35 | H/V | 37 | 32 | |
| | | | 3 | DOL | | | | | | | | |
| FN-35P | 5 (3.7) | 3" (80) | 3 | DOL | 19 | 0.6 | 36 | 35 | H | - | 35 | |



ACCESSORIES : ELBOW / GRS-GUIDE RAIL SYSTEMS

F/FN pumps can be installed with 90° Elbow Flange outlet or GRS guide rail system, to have easier / safer installation or removal during replacement and maintenance. The GRS does not support the vertical casing models.



ELBOW



GRS

PRODUCT FEATURES



Epoxy Cable Base

An epoxy resin seal cable base prevents moisture from entering the motor through the core wires.



Double Mechanical Seals

Superior abrasion resistant mechanical seal is manufactured with silicon carbide to ensure the best seal effect.



Auto-cut Protector

Automatic On / Off motor protector to prevent motor burn out due to high temperature and excess amperage draw.



High Efficiency Dry Motors

All stator coils are treated with insulating varnish procedures to achieve the best insulation, efficiency and durability.



Professionalism · Innovation · Service · Commitment
HCP PUMP MANUFACTURER CO., LTD.
www.hcppump.com



Distributor: